


# ETIMAT P10 3p C50

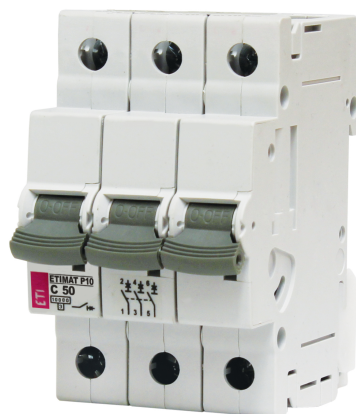

## Specifications

ETI Code	275031105
Description	ETIMAT P10 3p C50
Weight	360
Level	MCB and accessories
Catalogue Group	ETIMAT P10 Miniature circuit breakers 10kA
Function	MCB
No. Of poles	3p
Rated current	50A
Short circuit capacity	10kA
Tripping characteristic	c

Online product page [↗](#)

## Other documentation



CE declaration


Technical data catalogue




## ETIM international specifications

Frequency	50Hz
Voltage type	AC
Built-in depth	69,5mm
Nominal rated current	50A
Nominal rated voltage	400V
Release characteristic	C
Current limiting class	3
Over voltage category	3
Pollution degree	
Width in number of modular spacings	3
Degree of protection (IP)	IP20
Concurrently switching N-neutral	
Rated short-circuit breaking capacity EN 60898	10kA
Rated short-circuit breaking capacity IEC 60947-2	kA
Additional equipment possible	true
Number of poles (total)	3


# Melting energy characteristics

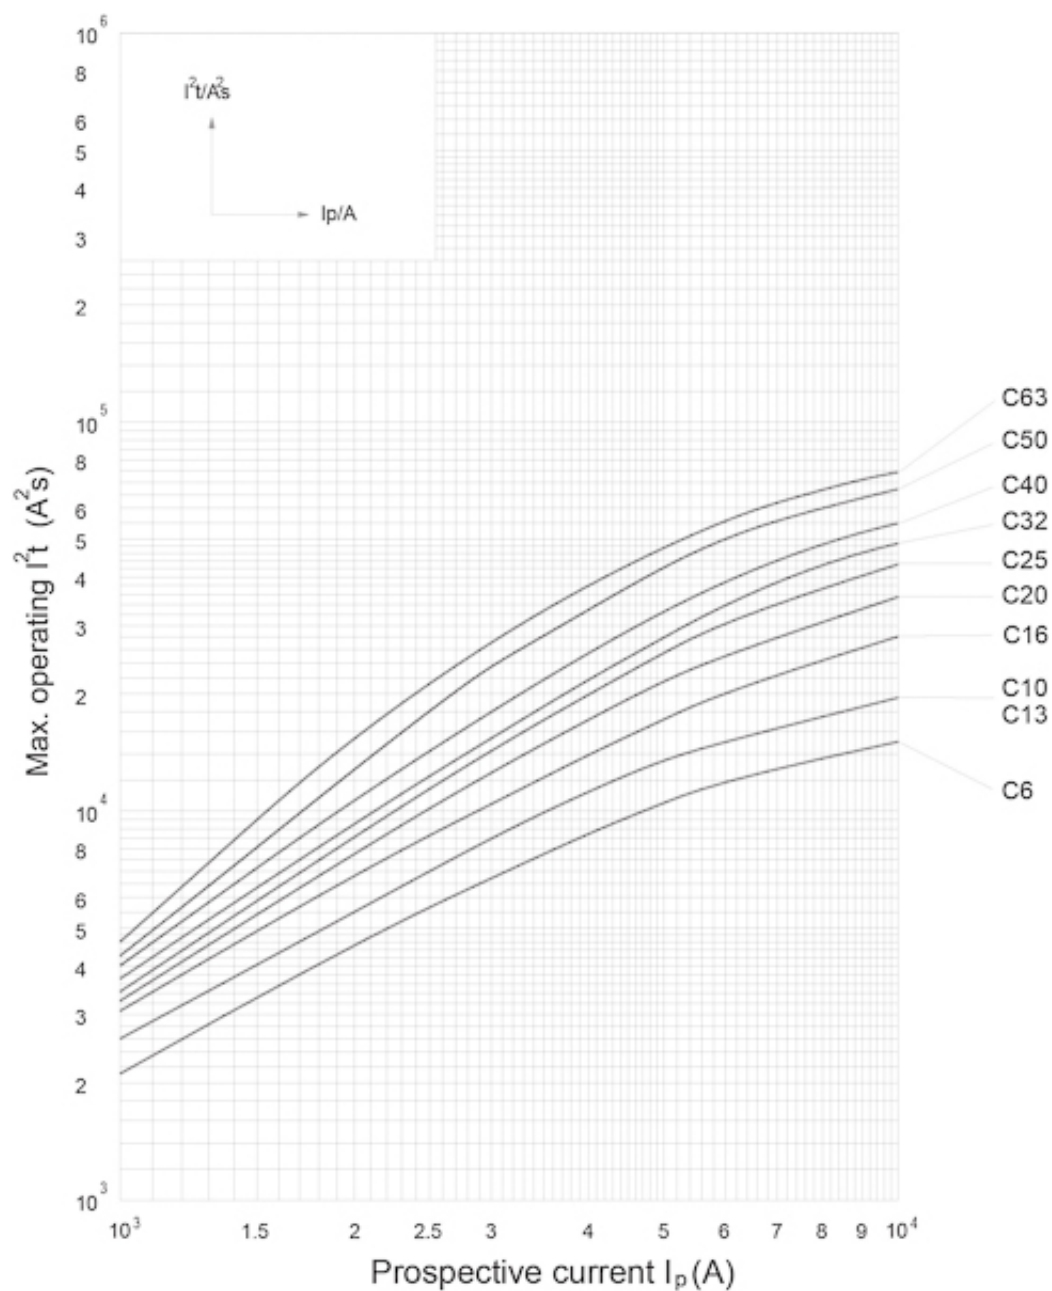

# Time current characteristics

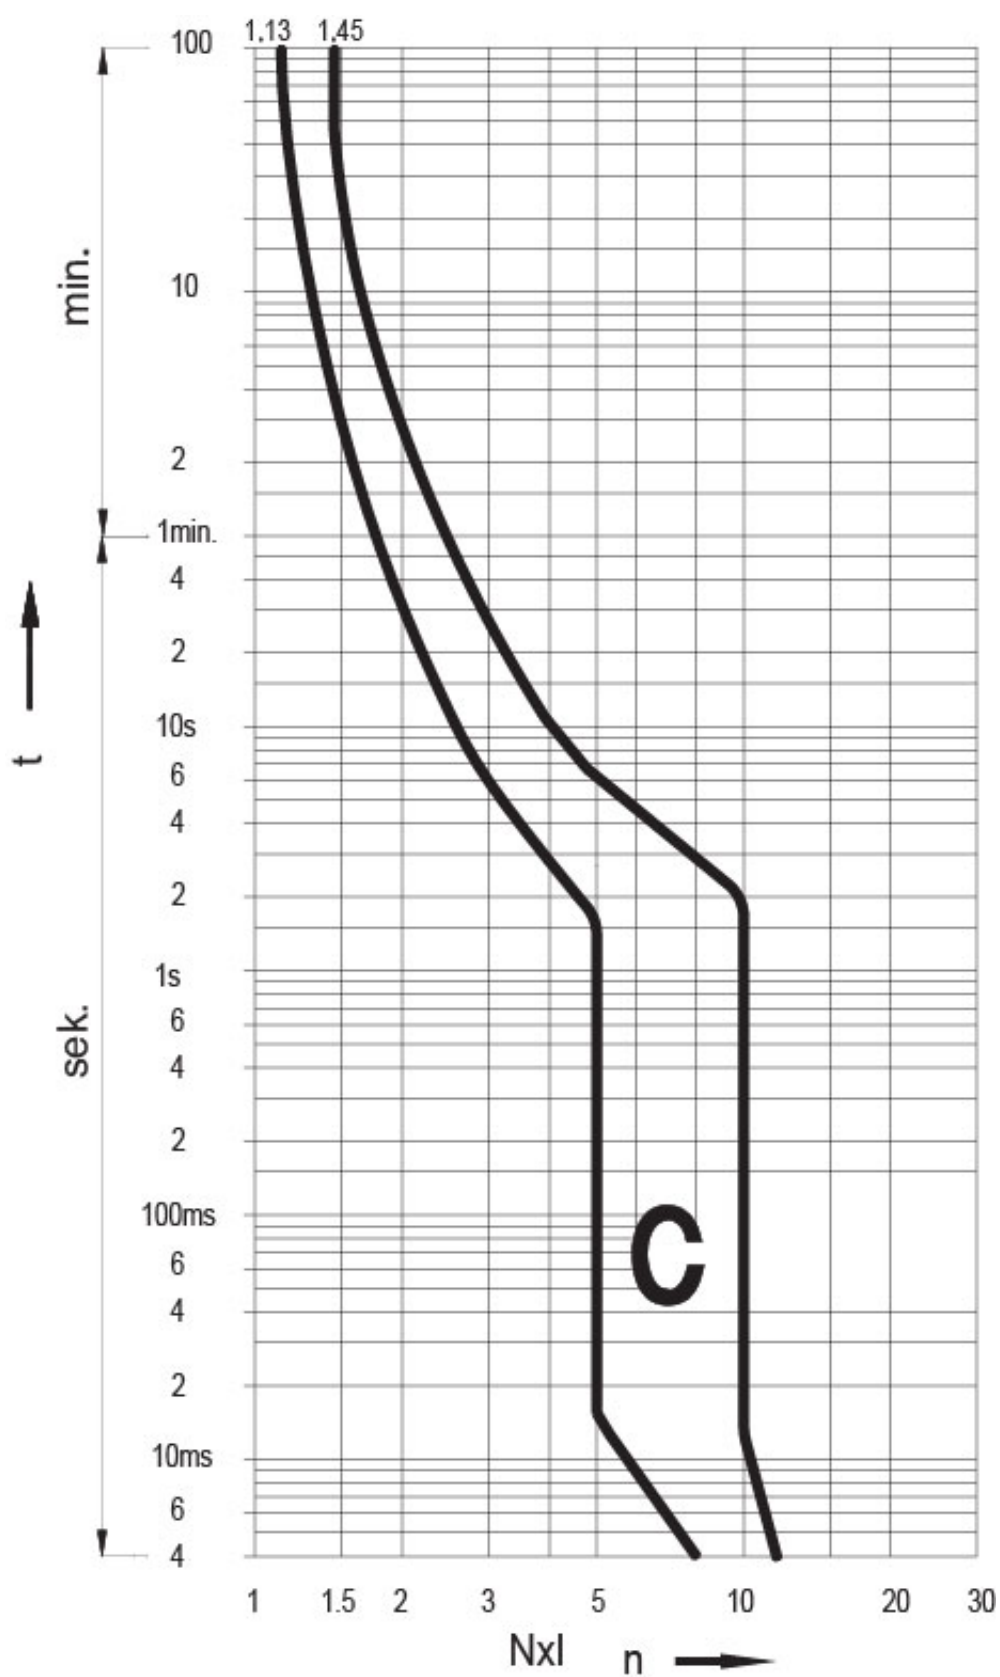


## Dimension drawing

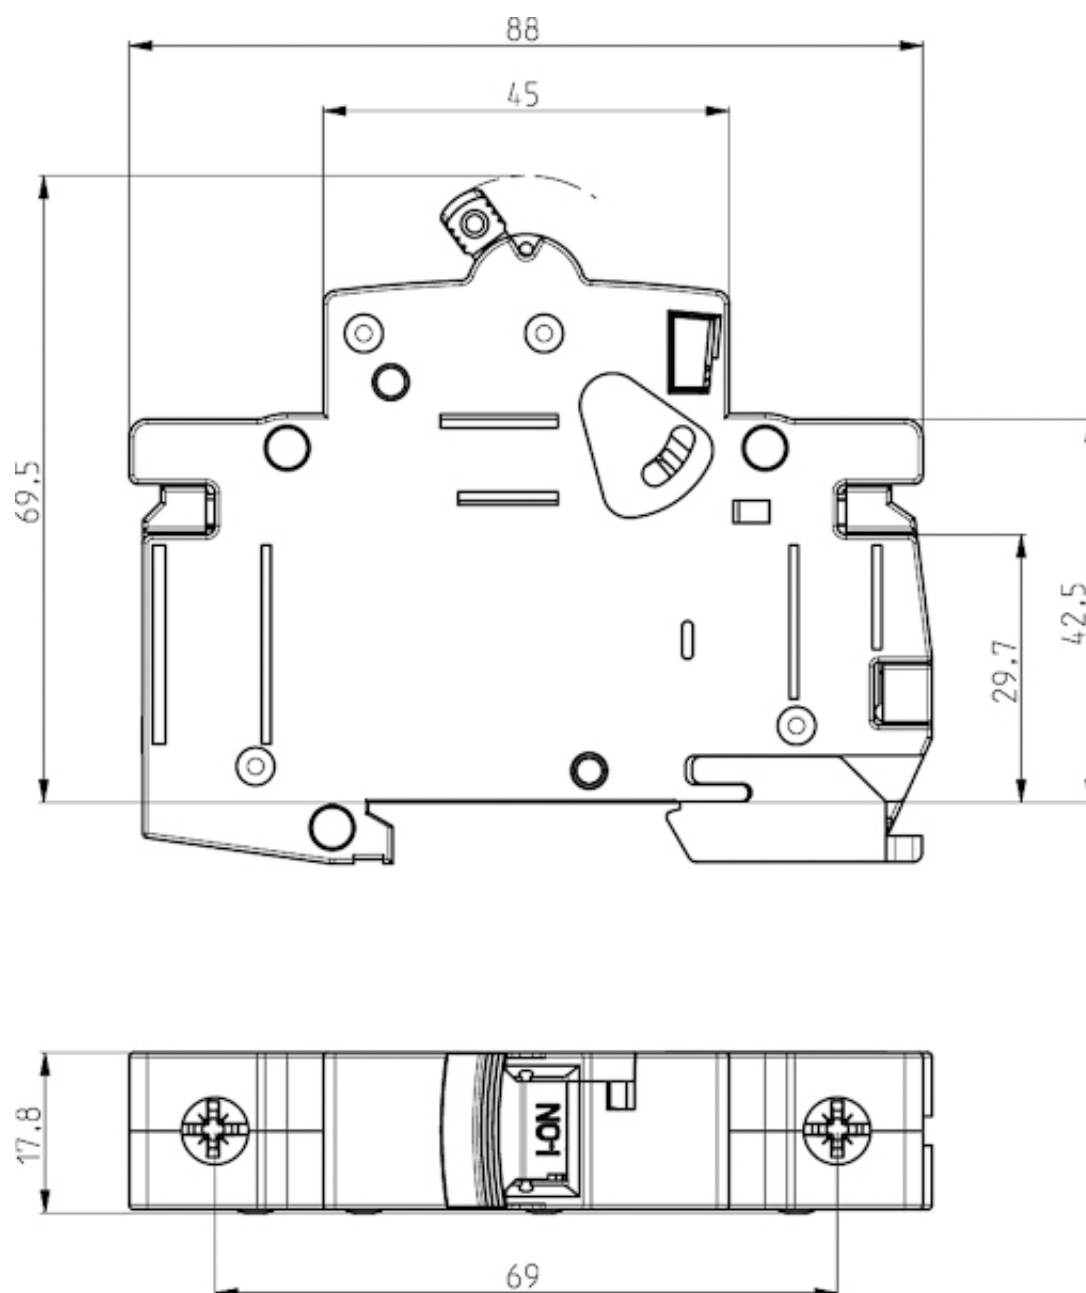


# Symbol/Connection




1p

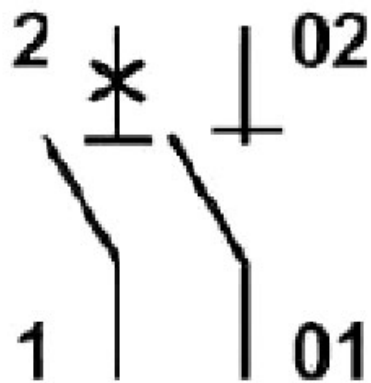


1p+N

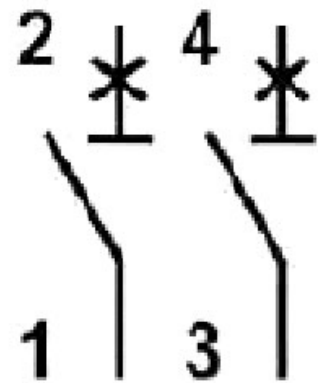

2p

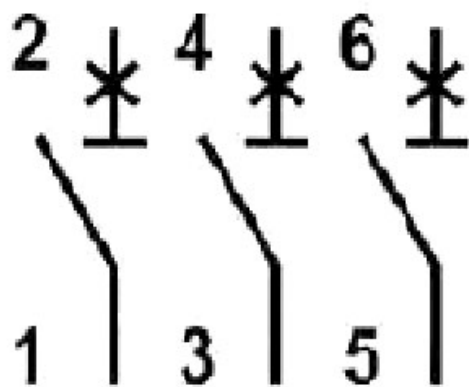

3p

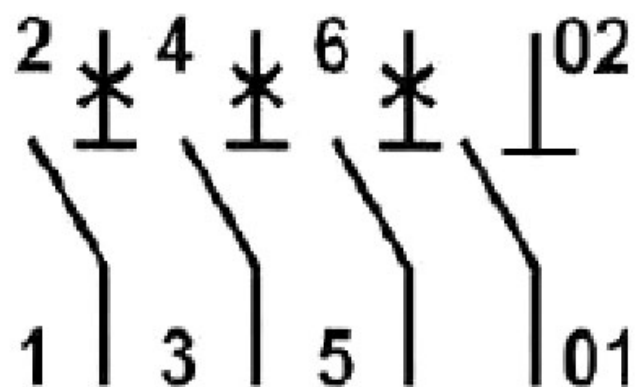

3p+N