


ETIMAT P10 3p C63

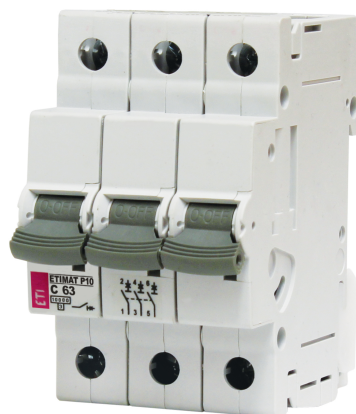

Specifications

ETI Code	276331105
Description	ETIMAT P10 3p C63
Weight	360
Level	MCB and accessories
Catalogue Group	ETIMAT P10 Miniature circuit breakers 10kA
Function	MCB
No. Of poles	3p
Rated current	63A
Short circuit capacity	10kA
Tripping characteristic	c

[Online product page](#)

Other documentation



[CE declaration](#)


[Technical data catalogue](#)




ETIM international specifications

Frequency	50Hz
Voltage type	AC
Built-in depth	69,5mm
Nominal rated current	63A
Nominal rated voltage	400V
Release characteristic	C
Current limiting class	3
Over voltage category	3
Pollution degree	
Width in number of modular spacings	3
Degree of protection (IP)	IP20
Concurrently switching N-neutral	
Rated short-circuit breaking capacity EN 60898	10kA
Rated short-circuit breaking capacity IEC 60947-2	kA
Additional equipment possible	true
Number of poles (total)	3


Melting energy characteristics

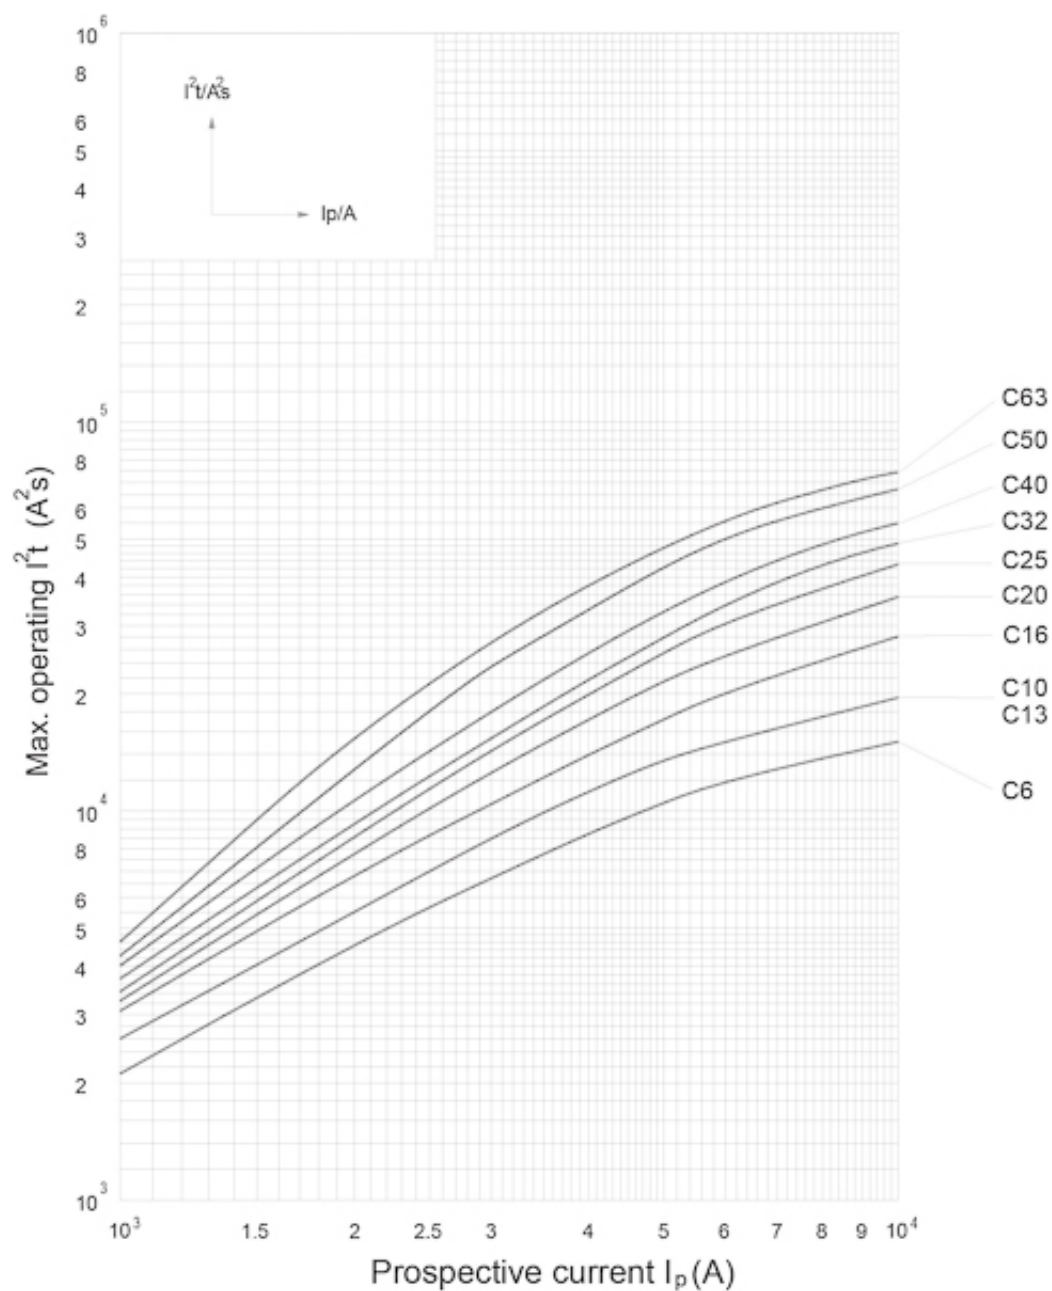

Time current characteristics

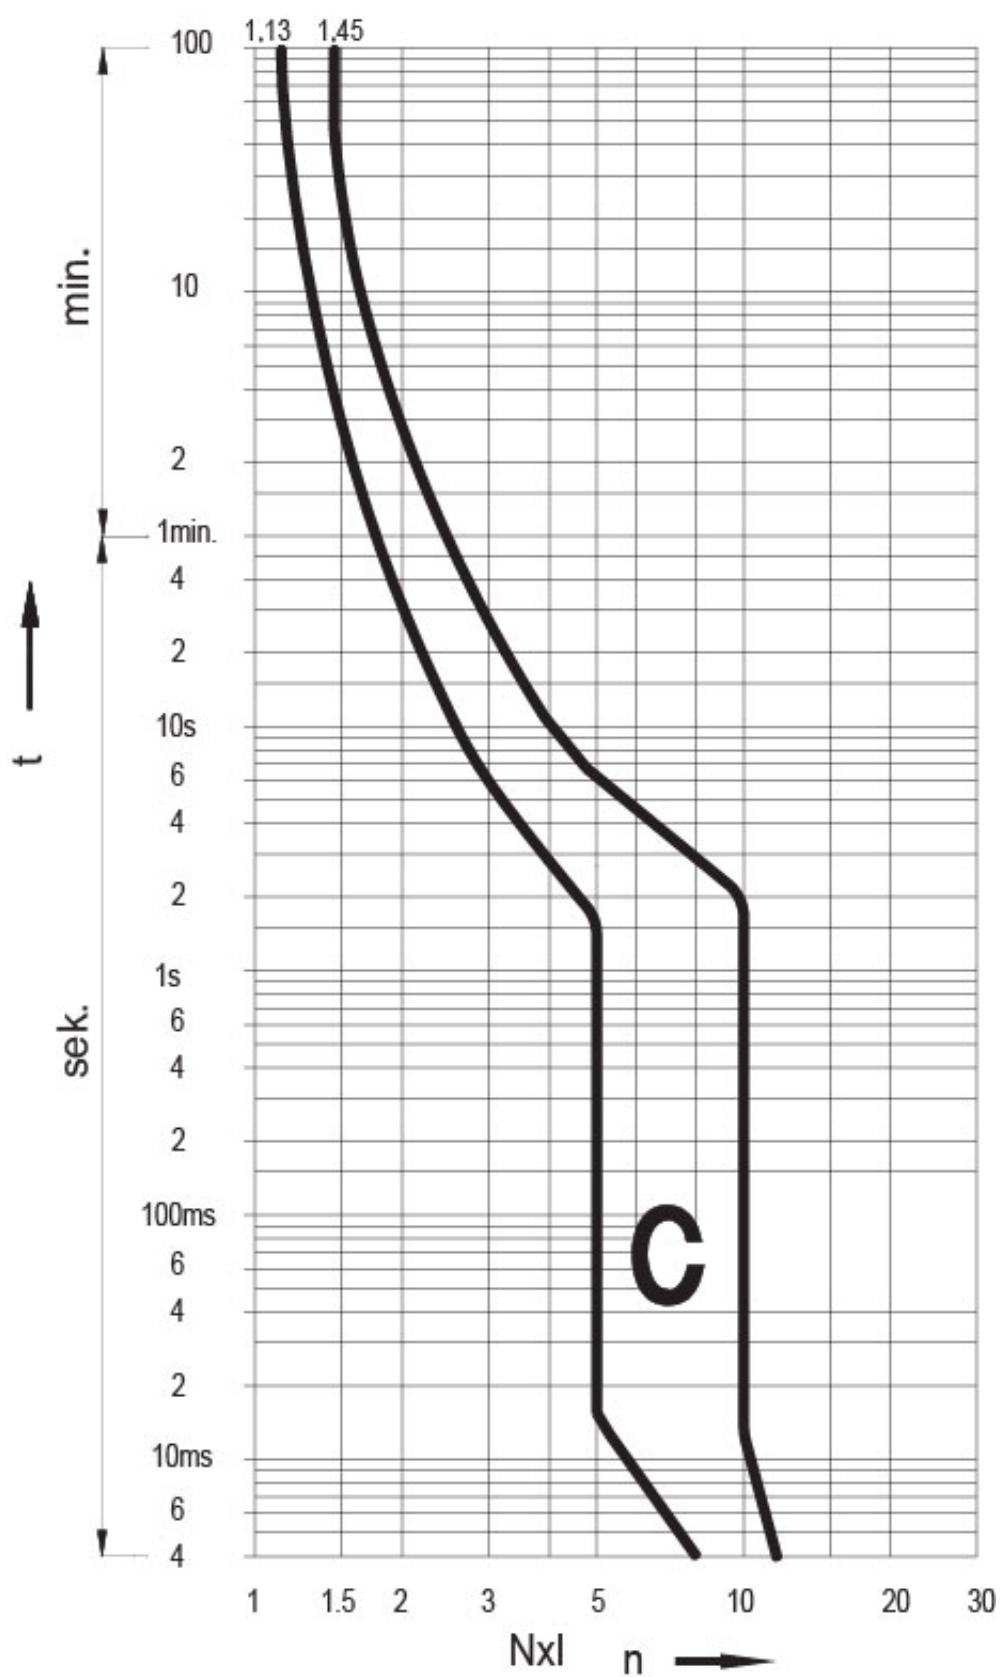


Dimension drawing

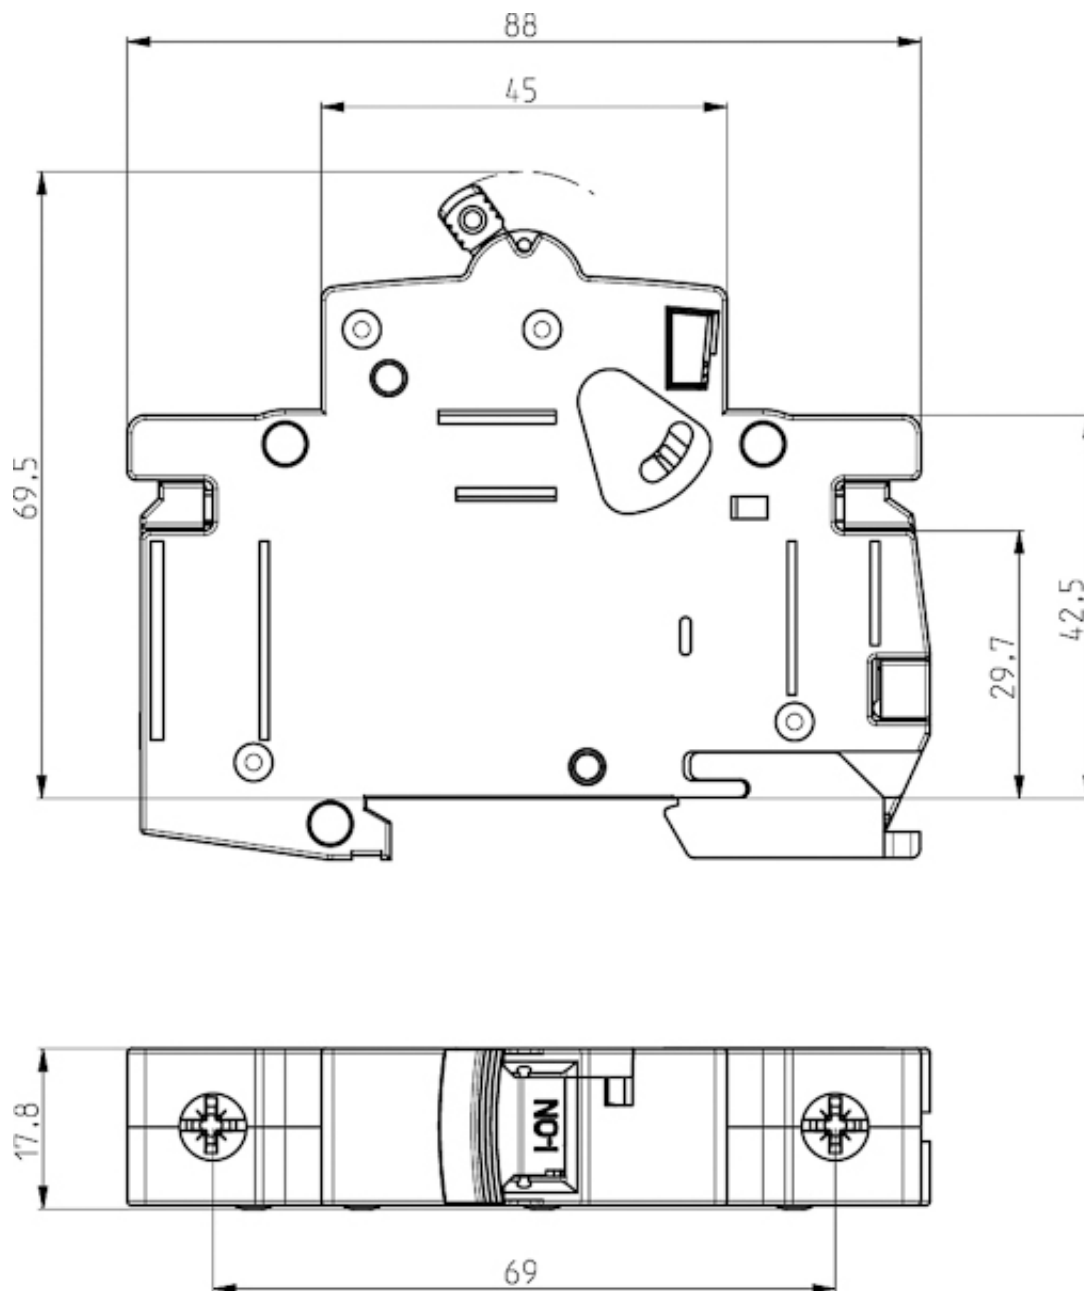


Symbol/Connection




1p

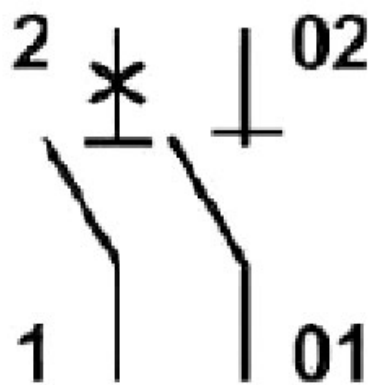


1p+N

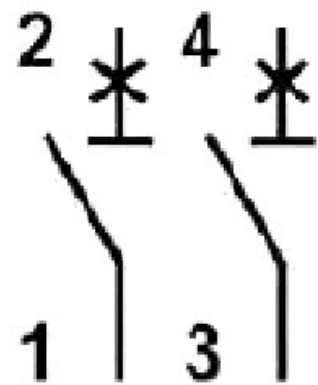

2p

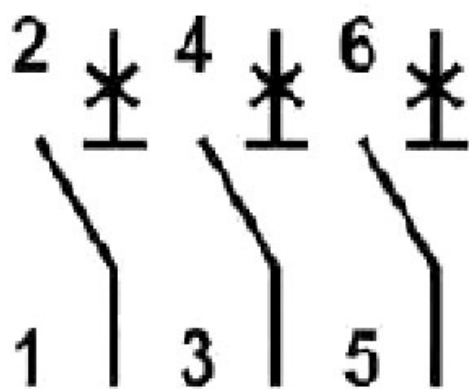

3p

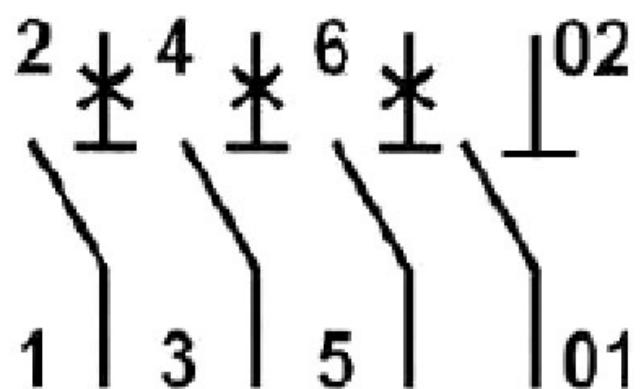

3p+N