

ADAPTO Series



INDUSTRIAL ADAPTORS



VERSIONS

	One-way adaptors
	2-way adaptors with interlocked-switch socket outlets
	2-way adaptors
	3/5-way adaptors
	3-way adaptors with protection devices
	4-way adaptors










TECHNICAL CHARACTERISTICS

Rated current:	16A-32A
Frequency:	50Hz
Insulating voltage:	500/690V~
Protection degree:	IP20-IP44-IP66-IP67
Operating temperature according to the reference standard:	-25°C +40°C
Max. operating temperature:	60°C
Glow Wire test:	650°C/750°C/850°C
Material:	Engineering plastic
IK degree at 20°C:	IK06 - IK09

BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Alcohol		
Resistant	Not Resistant	Not Resistant	Limited Resistance	Resistant	Not Resistant	Not Resistant	Not Resistant	Limited Resistance	Resistant	Resistant

AVAILABLE STANDARDS


 ITALIAN STANDARD P17/11 - 16A Shuttered socket CEI 23-50	 ITALIAN STANDARD P30 - 16A Shuttered socket CEI 23-50	 PLURISTANDARD 16A Shuttered socket	 BRITISH STANDARD - 13A Shuttered socket BS 1363-2	 FRENCH STANDARD - 16A Shuttered socket NFC 61-314
 BRITISH STANDARD - 15A Shuttered socket BS 546	 ARGENTINIAN STANDARD - 10A Unshuttered socket IRAM 2071	 NEW ZEALAND STANDARD - 10A Unshuttered socket AS/NZS 3112	 SOUTH AFRICAN STANDARD - 16A Shuttered socket SANS 164:1 (2006)	

APPLICATION EXAMPLES




DIMENSIONS


ONE-WAY ADAPTORS

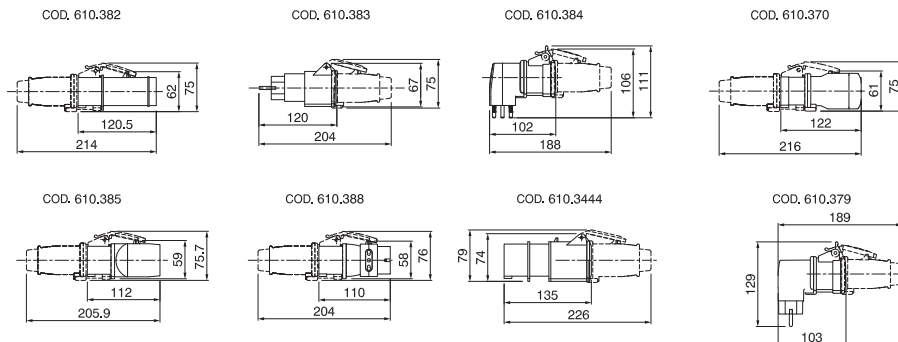


2-WAY ADAPTORS WITH INTERLOCKED SWITCH SOCKET OUTLETS

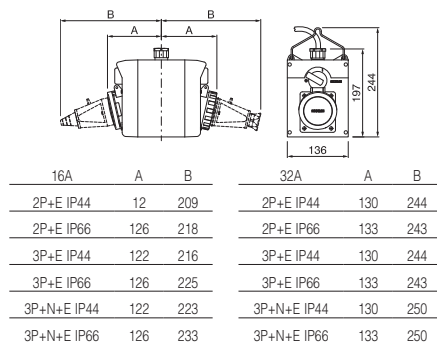

2-WAY ADAPTORS




3-WAY ADAPTORS

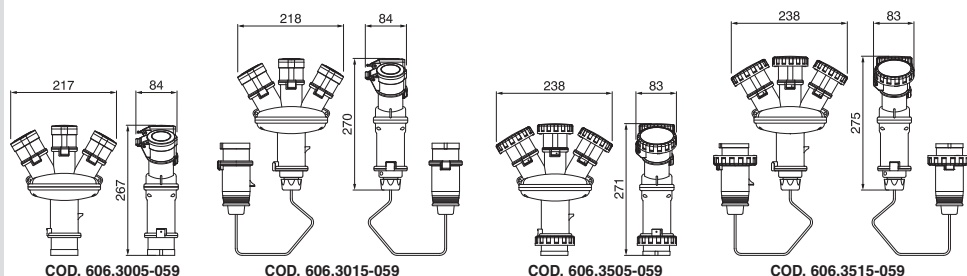


3/5-WAY ADAPTORS

	16A				32A			
	A	B	C	D	A	B	C	D
2P+E IP44	120	200	45	137	130	232	55	174
2P+E IP66	123	205	46	141	136	230	56	163
3P+E IP44	120	203	45	141	130	232	55	174
3P+E IP66	124	215	46	151	136	230	56	163
3P+N+E IP44	120	223	45	160	130	240	55	181
3P+N+E IP66	126	220	46	154	138	240	56	171

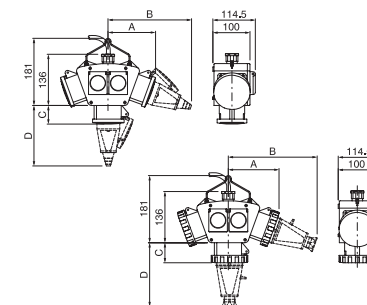

3-WAY ADAPTORS WITH PROTECTION DEVICES

	16A				32A			
	A	B	C	D	A	B	C	D
2P+E IP44	181	201	106	189	127	235	/	/
2P+E IP66	127	213	115	201	132	230	/	/
3P+E IP44	118	205	106	193	127	235	/	/
3P+E IP66	127	222	115	210	132	230	/	/
3P+N+E IP44	116	220	104	208	135	250	/	/
3P+N+E IP66	127	225	115	213	132	236	/	/



4-WAY ADAPTORS

	16A				32A			
	A	B	C	D	A	B	C	D
2P+E IP44	118	201	106	189	127	235	/	/
2P+E IP66	127	213	115	201	132	230	/	/
3P+E IP44	118	205	106	193	127	235	/	/
3P+E IP66	127	222	115	210	132	230	/	/
3P+N+E IP44	116	220	104	208	135	250	/	/
3P+N+E IP66	127	225	115	213	132	236	/	/

