

PŘÍSLUŠENSTVÍ K SPB, SPF

Přechodové svorky

- Jsou určeny pro přechod ze svorky šroubové na svorku typu "V" nebo "W".
- Typ V, W je určen pro jeden vodič.
- Typ WD je určen pro smyčkování dvou vodičů.

Jmenovité zatížení [A]	Typ	Objednávací kód	Hmotnost [kg]	Balení [ks]
160	V8	OEZ:07387	0,030	15
	V10	OEZ:14146	0,030	15
400	W10	OEZ:07388	0,042	12
	W12	OEZ:07389	0,042	12
400	WD8-1	OEZ:08749	0,110	12
	WD10-1	OEZ:08750	0,110	12
	WD8-2	OEZ:08751	0,110	12
	WD10-2	OEZ:08752	0,120	12
	WD8-3	OEZ:08753	0,130	6
	WD10-3	OEZ:08754	0,160	12

Parametry

Typ	Pro třmeny	Použití	Průměr otvoru - D	Pro šroub	
V8	4836 N-S, 4835, 5836-2x70	SPF00, SPB00, S3PB00	9	M8	
V10	4836 N-S, 4835, 5836-2x70	SPF00, SPB00, S3PB00	11	M10	
W10	5845, 5837-2x240	SPF1, SPF2, SPB1, SPB2, S3PB1, S3PB2	11	M10	
W12	5845, 5837-2x240	SPF1, SPF2, SPB1, SPB2, S3PB1, S3PB2	12,5	M12	
WD8-1	5845, 5837-2x240	SPF00, SPB00	9	M8	
WD10-1	5845, 5837-2x240	SPF1, SPF2, SPF3, SPB1, SPB2	11	M10	
WD8-2	5845, 5837-2x240	2xSPF00, 2xSPB00	9	M8	
WD10-2	5845, 5837-2x240	2xSPF1, 2xSPF2, 2xSPB1, 2xSPB2	11	M10	
WD8-3	5845, 5837-2x240	S3PB00, 3xSPF00, 3xSPB00	9	M8	
WD10-3	5845, 5837-2x240	S3PB1, 3xSPF1, 3xSPF2 ¹⁾ , 3xSPB1, 3xSPB2	11	M10	

¹⁾ Pouze s pojistkovou vložkou od OEZ s.r.o.



400 A 400 A



400 A 400 A




400 A 400 A


PŘÍSLUŠENSTVÍ K SPB, SPF

Rozměry


typ „V“




typ „W“




WD8-1

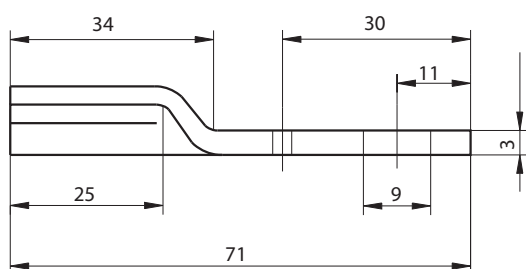


WD8-2, WD10-2

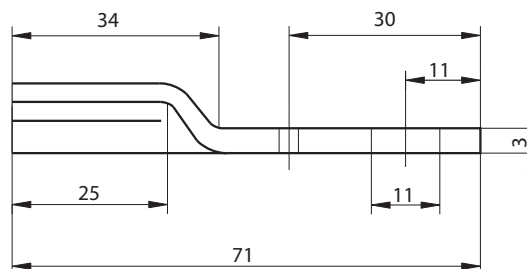


WD10-1

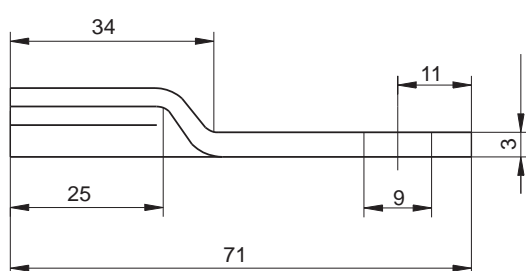

WD8-3, WD10-3

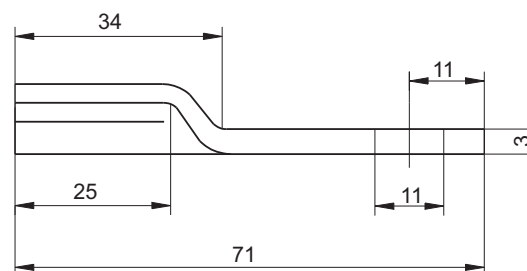

Doporučená podpora pro WD8, WD10

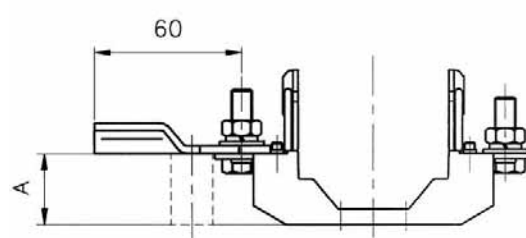

Výška podpěry pro typ	Rozměry [mm] A
SPF00	27
SPB00	21,7