
Objednáací číslo
OTL 35-3X
OTL 50-3X
OTL 35-5X


Šedá	MAA1335A10	MAA1350A10	-
Šedá, modrá, žluto-zelená	-	-	MAA5035A10

Technická data

Rozsah upínaných vodičů Cu, Al [mm ²]	2.5 ÷ 35	1.5 ÷ 50	2.5 ÷ 35
Jmenovité napětí [V]	1000	1000	1000
Jmenovitý proud [A]	3 x 135 (Cu) / 3 x 120 (Al)	3 x 160 (Cu) / 3 x 145 (Al)	3 x 135 (Cu) / 3 x 120 (Al)
Šířka / výška / délka [mm]	46 / 40 / 46	49 / 43 / 49	79 / 40 / 65
Hlava šroubu	inbus č. 4	inbus č. 5	inbus č. 4
Utahovací moment [Nm]	3 Nm (2.5 ÷ 16 mm ²) 6 Nm (25 ÷ 35 mm ²)	1.5 Nm (1.5 ÷ 2.5 mm ²) 5 Nm (4 ÷ 10 mm ²) 10 Nm (16 ÷ 50 mm ²)	3 Nm (2.5 ÷ 16 mm ²) 6 Nm (25 ÷ 35 mm ²)
Způsob uchycení	lišta DIN	lišta DIN	lišta DIN, šrouby
Hmotnost [g]	70	81	120
Balení [ks]	20	20	10

Rozměry

OTL 35-3X / OTL 50-3X

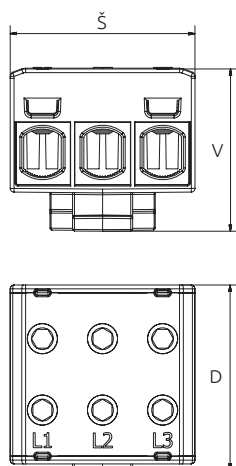

OTL 35-3X

